



CBHD3

Main features:

Reduced weight and dimensions


Power from 180W up to 600W

Current from 15A to 25A

Available in plastic and metal case
(ON-BOARD use only)

APPLICATIONS



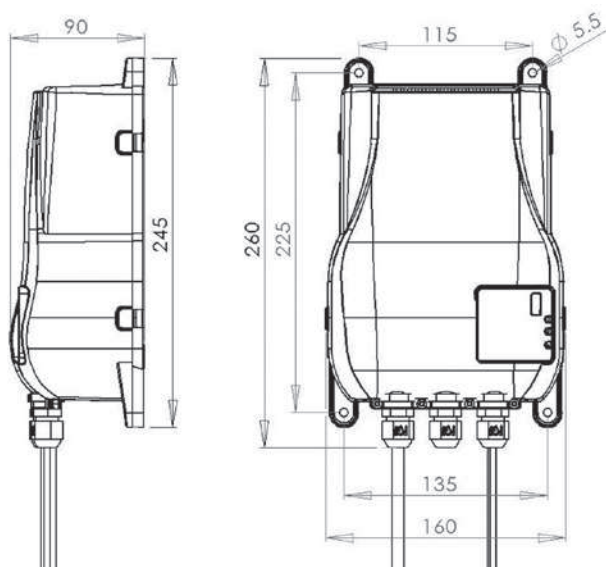

DIMENSIONS (LxWxH): 160x245x90 mm – 6.30x9.65x3.54 in

WEIGHT: 2,50 Kg – 5.51 lbs

PROTECTION GRADE IP30

INPUT VOLTAGE: Universal 100 ÷ 240 Vac – 50-60 Hz

Battery Voltage	Battery Range		Charging Current	Model
	5h	20h		
12V	100÷150 Ah	130÷180 Ah	15A	12-15
	120÷195 Ah	150÷240 Ah	20A	12-20
	180÷260 Ah	220÷315 Ah	25A	12-25
24V	100÷150 Ah	130÷180 Ah	15A	24-15
	120÷195 Ah	150÷240 Ah	20A	24-20
	180÷260 Ah	220÷315 Ah	25A	24-25