

6-EVF-110AH(3HR)

12V110AH/3HRVRLA GEL BATTERY



Chilwee-Graphene EVF Series VRLA Gel Battery is specially designed for electric vehicles, i.e. electric automobiles, electric road vehicles, golf cart, low speed electric cart, etc. and other devices require DC power source. The Series have add the super graphene material which adopts international leading technologies to ensure the batteries with features of long cycle life, large current discharge capability, high reliability and safety, and environmental-friendly.

FEATURES

Extra Long Life: Chilwee-Graphene EVF Series are designed with high quality grid alloy enables the grid with features of anti-corrosion, low gas emission and excellent deep cycle performance, as well as high density and special deep cycle lead paste prescription is adopted to ensure extra long cycle life. The cycle life may reach 1000+ cycles @ 50% DOD.

High Capacity and High Energy Density: Chilwee-Graphene EVF Series are designed with adequate active material and higher electrolyte density to increase the battery's capacity within certain dimension and weight, so as to keep the battery with high energy density to be compatible with most of the electric vehicle without providing extra space to install batteries.

Super graphene material inside: High strength ABS battery container and lid, perfect safety valve design, and high strength & excellent large current electroconductivity copper terminal design are adopted to ensure the Chilwee EVF Series with high reliability and safety at extreme condition.




High Environmental Adaptability: Chilwee-Graphene EVF Series adopts special fumed silica Gel in electrolyte and special Gel type separator to prevent electrolyte stratification. This can significantly improve the battery's service life and environmental adaptability.

Non-Cadmium Design, Environment-friendly: Chilwee-Graphene Battery has adopted internationally leading technology - container formation non-cadmium production technology, which is in the leading position in the industry. It helps to save energy 28.5%, save water 90%, and non-discharge of waste water.







SPECIFICATION

Nominal Voltage (V)		12V
Open Circuit Voltage (V/Block)		12.8V - 13.4V
Number of Cells (Per Block)		6 Cells
Rated Capacity (Ah, 25°C)	2h rate (to 1.75V/Cell)	95Ah
	3h rate (to 1.75V/Cell)	110Ah
	5h rate (to 1.75V/Cell)	119Ah
	10h rate (to 1.80V/Cell)	126Ah
	20h rate (to 1.80V/Cell)	135Ah
Nominal Weight (Kgs)		Approx. 32.5±0.5Kgs
Dimension (L X W X H, Total Height. mm)		(332mm±3) X (177mm±3) X (219mm±3), (219mm±3)
Container Material		Enhanced ABS
Charge Voltage	Float (V/Block)	13.80V
	Cycle (V/Block)	14.65V - 14.75V
Maximum Discharge Current (A)		500A (5s)
Maximum Charge Current (A)		16A

DIMENSION

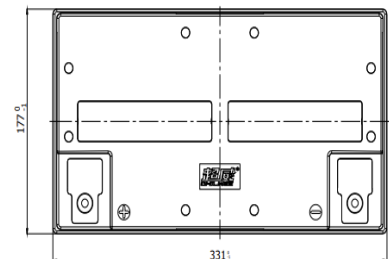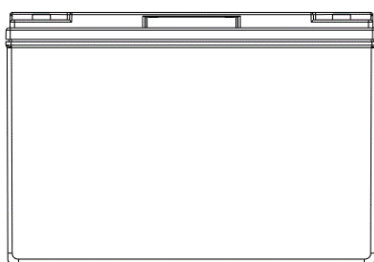


TECHNICAL CURVES

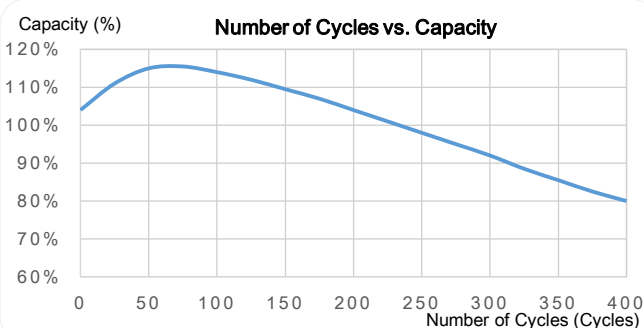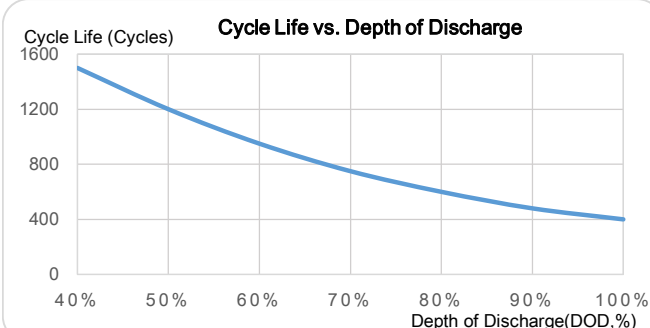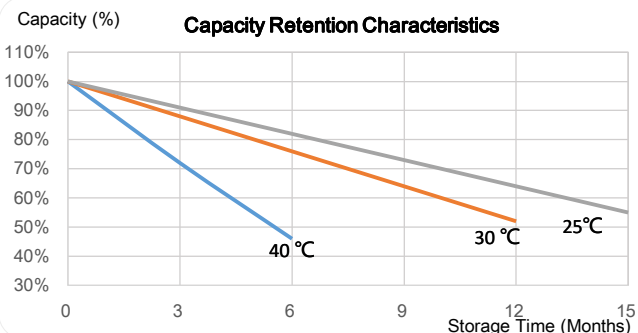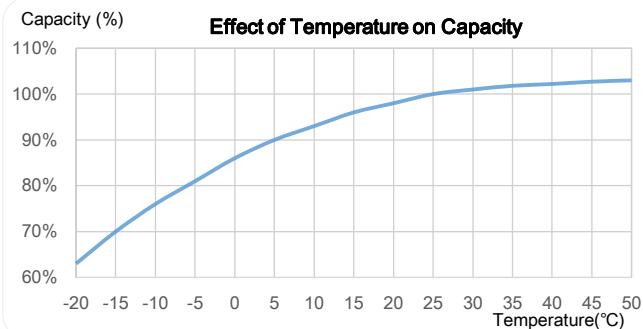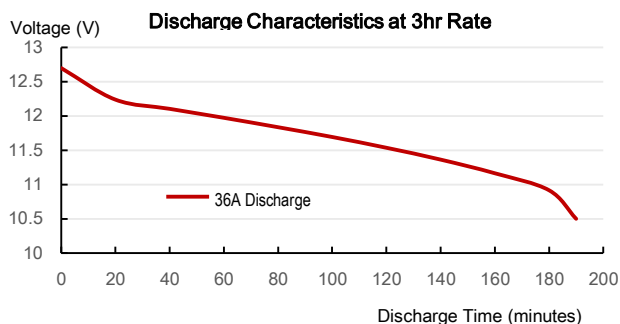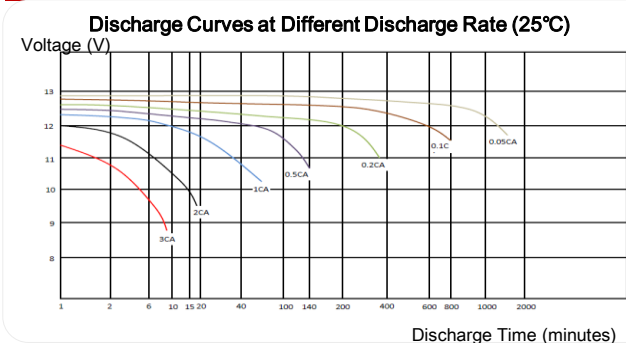

CHARGE CURVE & METHOD

Charge Curve for 6-EVF-100A(for Single Cell)

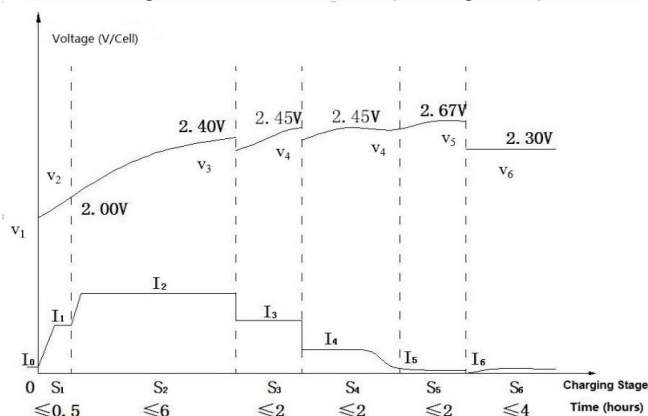

Charge Method

- 1. Pre-charge Stage:** When the battery is connected to the charger, the charger shall detect the voltage of the battery. For the battery's voltage at between V1-V2 or the battery pack is pre-charged at a current between I0-I1. When the battery's voltage reaches V2 or the charge time reaches S1, the charge enters into next stage. Parameters refer to Table 1, Appendix.
- 2. Constant Current Charge Stage:** Charge current is I2; When the charge voltage reaches V3 or the charge time reaches S2, the charge enters into next stage. Parameters refer to Table 2, Appendix.
- 3. Constant Current Charge Stage:** Charge current is I3; When the maximum voltage reaches V4 or the charge time reaches S3, the charge enters into next stage. Parameters refer to Table 3, Appendix.
- 4. Constant Voltage Limited Current Charge Stage:** The constant charge voltage is V4, limited current is I4. When the charge current drops to the lower limit value of I4 as Table 4 shown, or the charge time reaches S4, the charge enters into next stage. Parameters refer to Table 4, Appendix.
- 5. Trickle Charge Stage:** When the charge time S2 is less than 3 hours, trickle charge is not activated. Otherwise the limited voltage is V5 the constant current is I5 or the charge time reaches S5, the charge enters into next stage. Parameters refer to Table 5, Appendix.
- 6. Float Charge Stage:** Constant voltage is V6, limited current is I6. The charger shall be cut off while the charge time is within 4 hours. Parameters refer to Table 6, Appendix.

Detailed Charging Parameters please refer to "APPENDIX II: CHARGE PARAMETERS FOR EVF SERIES"

* All the data and technical curves are for customer's reference only. This information is subject to change without any prior notice.

For More Information, please contact:

Henan Chilwee Genshore POWER CO., LTD.

West Industrial Road, Qinyang Industrial Park, Henan Province, China. 313100

Tel: +86 572 6216629

Fax: +86

Web: www.chilwee-genshore.com/en

Email: xiaole.shi@chilwee-genshore.com

APPENDIX II: CHARGE PARAMETERS FOR EVF SERIES

Table 1 - Parameters for Pre-charge Stage

Battery Model	Voltage Range: $V_1 - V_2$ (V per Block)	Constant Current: $I_0 \sim I_1$ (A)	Pre-Charge Time: S_1 (h)	Temperature Compensation (V/°C)
3-EVF-210	3.0V - 6.0V	3.1A - 18.0A	$\leq 0.5h$	
4-EVF-160	4.0V - 8.0V	2.2A - 14.0A		
6-EVF-75	6.0V - 12.0V	2.0A - 7.0A		
6-EVF-83	6.0V - 12.0V	2.0A - 8.0A		
6-EVF-110	6.0V - 12.0V	2.5A - 11.0A		
6-EVF-130	6.0V - 12.0V	2.5A - 12.0A		

Table 2 - Parameters for Constant Current Charge Stage

Battery Model	Voltage Range: V_3 (V per Block)	Constant Current: I_2 (A)	Charge Time: S_2 (h)	Temperature Compensation (V/°C)
3-EVF-210	7.2V	30.0A	$\leq 6h$	-0.012
4-EVF-160	9.6V	25.0A		-0.016
6-EVF-75	14.4V	12.0A		-0.024
6-EVF-83	14.4V	14.0A		-0.024
6-EVF-110	14.4V	15.0A		-0.024
6-EVF-130	14.4V	20.0A		-0.024

Table 3 - Parameters for Constant Current Charge Stage

Battery Model	Voltage Range: V_4 (V per Block)	Constant Current: I_3 (A)	Charge Time: S_3 (h)	Temperature Compensation (V/°C)
3-EVF-210	7.35V	22.0A	$\leq 2h$	-0.012
4-EVF-160	9.80V	16.0A		-0.016
6-EVF-75	14.70V	7.0A		-0.024
6-EVF-83	14.70V	8.0A		-0.024
6-EVF-110	14.70V	11.0A		-0.024
6-EVF-130	14.70V	13.0A		-0.024

Table 4 - Parameters for Constant Voltage Limited Current Charge Stage

Battery Model	Voltage Range: V_4 (V per Block)	Limited Current: I_4 (A)	Charge Time: S_4 (h)	Temperature Compensation (V/°C)
3-EVF-210	7.35V	10.0A - 3.6A	$\leq 2h$	-0.012
4-EVF-160	9.80V	7.8A - 2.7A		-0.016
6-EVF-75	14.70V	3.5A - 1.3A		-0.024
6-EVF-83	14.70V	4.0A - 1.5A		-0.024
6-EVF-110	14.70V	5.0A - 1.8A		-0.024
6-EVF-130	14.70V	6.0A - 2.2A		-0.024

Table 5 - Parameters for Trickle Charge Stage

Battery Model	Voltage Range: V_5 (V per Block)	Limited Current: I_5 (A)	Charge Time: S_5 (h)	Temperature Compensation (V/°C)
3-EVF-210	8.01V	2.0A	$\leq 2h$	-0.012
4-EVF-160	10.68V	1.5A		-0.016
6-EVF-75	16.02V	0.7A		-0.024
6-EVF-83	16.02V	0.8A		-0.024
6-EVF-110	16.02V	1.0A		-0.024
6-EVF-130	16.02V	1.2A		-0.024

Table 6 - Parameters for Float Charge Stage

Battery Model	Voltage Range: V_6 (V per Block)	Limited Current: I_6 (A)	Charge Time: S_6 (h)	Temperature Compensation (V/°C)
3-EVF-210	6.9V	2.0A	$\leq 4h$	-0.012
4-EVF-160	9.2V	1.5A		-0.016
6-EVF-75	13.8V	0.7A		-0.024
6-EVF-83	13.8V	0.8A		-0.024
6-EVF-110	13.8V	1.0A		-0.024
6-EVF-130	13.8V	1.2A		-0.024